

HOECKER P-SERIES Structures

A FRAME DESIGN

P0600-240-350

Specifications

Span width:

6.00m

Eave Height:

2.40m

Ridge height:

3.50m (internal)

Peak height:

N/A

Bay distance:

3.00m

Roof pitch:

20°

No of gable uprights:

1

Longest component (m):

3.74m

Minimum length:

6.00m

Maximum length:

Unlimited in 3.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to DIN:

80 km/h (0.30kN/m²)

Main profile size:

89/48/3mm (2-channel) or 110/48/3mm (4-channel)

Eave connection type:

Internal Galvanised Steel Insert

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

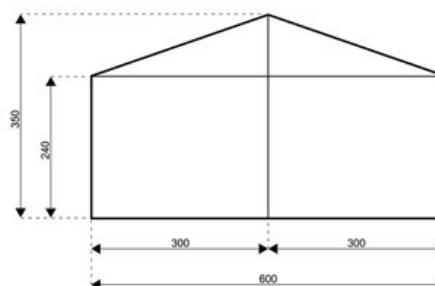

Accessories Available

- ▶ Georgian or Clear PVC window walls
- ▶ Glass walling systems
- ▶ Integrated cassette ABS / hard walling system.
- ▶ Integrated cassette ISO / hard walling system.
- ▶ Internal flat or pleated linings
- ▶ Multi-sided end bays
- ▶ Overhead door canopies
- ▶ Portal beams instead of cross wires
- ▶ More accessories are available...



SKIPPY-RENTEVENTS®
Evenementenservice

www.skippy-rent.nl

HOECKER P-SERIES Structures

A FRAME DESIGN

P0800-240-387

Specifications

Span width:
8.00m

Eave Height:
2.40m

Ridge height:
3.87m (internal)

Peak height:
N/A

Bay distance:
3.00m

Roof pitch:
20°

No of gable uprights:
1

Longest component (m):
4.55m

Minimum length:
6.00m

Maximum length:
Unlimited in 3.00 m increments

Snow loading compliance:
N/A

Max allowed wind speed to DIN:
80 km/h (0.30kN/m²)



Main profile size:
89/48/3mm (2-channel) or 110/48/3mm (4-channel)

Eave connection type:
Internal Galvanised Steel Insert

Aluminium type:
European - Hard Pressed Extruded Structural Aluminium

Connecting components:
European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:
Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

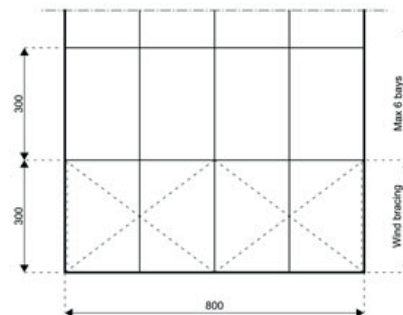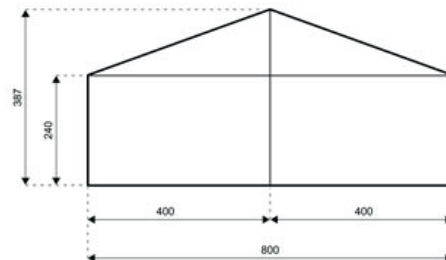

Accessories Available

- ▶ Georgian or Clear PVC window walls
- ▶ Glass walling systems
- ▶ Integrated cassette ABS / hard walling system.
- ▶ Integrated cassette ISO / hard walling system.
- ▶ Internal flat or pleated linings
- ▶ Multi-sided end bays
- ▶ Overhead door canopies
- ▶ Portal beams instead of cross wires
- ▶ More accessories are available...



SKIPPY-RENTEVENTS®
Evenementenservice

www.skippy-rent.nl

HOECKER P-SERIES Structures

A FRAME DESIGN

P1000-240-423

Specifications

Span width:

10.00m

Eave Height:

2.40m

Ridge height:

4.23m (internal)

Peak height:

N/A

Bay distance:

3.00m

Roof pitch:

20°

No of gable uprights:

2

Longest component (m):

5.37m

Minimum length:

6.00m

Maximum length:

Unlimited in 3.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to DIN:

80 km/h (0.30kN/m²)

Main profile size:

89/48/3mm (2-channel) or 110/48/3mm (4-channel)

Eave connection type:

Internal Galvanised Steel Insert

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

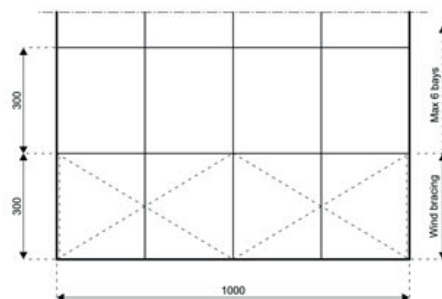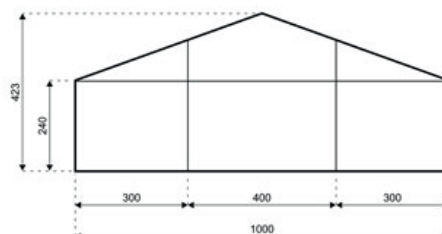

Accessories Available

- ▶ Georgian or Clear PVC window walls
- ▶ Glass walling systems
- ▶ Integrated cassette ABS / hard walling system.
- ▶ Integrated cassette ISO / hard walling system.
- ▶ Internal flat or pleated linings
- ▶ Multi-sided end bays
- ▶ Overhead door canopies
- ▶ Portal beams instead of cross wires
- ▶ More accessories are available...



SKIPPY-RENTEVENTS®
Evenementenservice

www.skippy-rent.nl



HÖCKER P-SERIES Structures

A-Frame Design

P1200-240-458

SPECIFICATIONS

Span width:

12.00m

Eave Height:

2.40m

Ridge height:

4.58m

Peak height:

N/A

Bay distance:

3.00m

Roof pitch:

20°

Number of gable uprights:

3 Gable uprights (per end)

Longest component (m):

6.38m

Minimum length:

6.00m

Maximum length:

Unlimited in 3.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

80 km/h (0.30kN/m²)

Main profile size:

110/48/3mm (4-channel)

Eave connection type:

Internal Galvanised Steel Insert

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

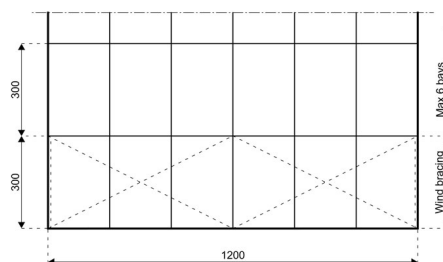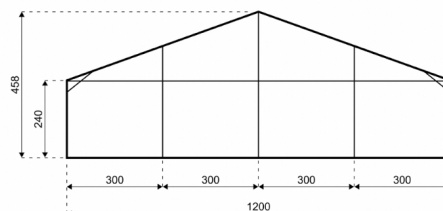

ACCESSORIES AVAILABLE

- ▶ Aluminium Cassette Flooring with Ply Boards
- ▶ Internal Decorative Linings
- ▶ Double Entrance/Exit Door
- ▶ Scalloped Edge Roof Valance
- ▶ Portal Beam to replace Diagonal Bracing
- ▶ Single Entrance/Exit Door
- ▶ Bar Tensioned Roof
- ▶ Single Layer PVC Roof
- ▶ External / Internal Entrance Ramp
- ▶ PVC Side Wall
- ▶ Clear Poly-glass Roof
- ▶ More accessories are available...



HEAD OFFICE AND PRODUCTION

Röder HTS Höcker GmbH
Hinter der Schlagmühle 1
Kefenrod, D-63699
Germany

Telephone: +49 (0) 60 49 95 100

Fax: +49 (0) 60 49 95 1020

Email: sales@roderhts.com

Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:

Australia
Austria
Bosnia
Bulgaria

Central America
Croatia
France
Ireland
Germany

Great Britain
Greece
Romania
India
Ireland
Italy

Middle Asia
Middle East
Netherlands
North America
Poland
Russia

Scandinavia
Singapore
Slovenia
South Africa
South America
Spain
Switzerland



HÖCKER F-SERIES Structures

A-Frame Design

SPECIFICATIONS

F15-300-202

Span width:

15.00m

Eave Height:

3.00m

Ridge height:

5.51m

Peak height:

N/A

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

2 Gable upright (per end)

Longest component (m):

8.00m

Minimum length:

10.00m

Maximum length:

Unlimited in 5.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

102 km/h (0.50kN/m²)

Main profile size:

202/122/4mm (4-channel)

Eave connection type:

Sliding connection

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

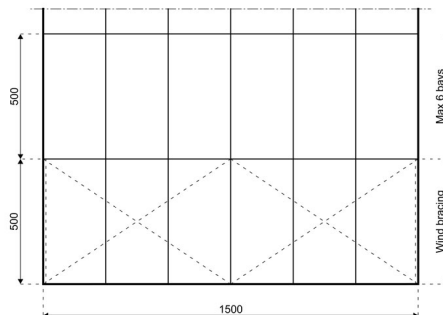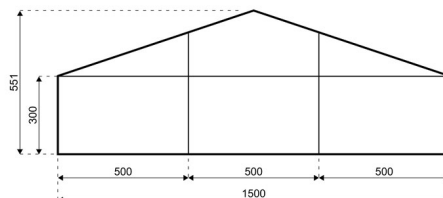

ACCESSORIES AVAILABLE

- ▶ External / Internal Entrance Ramp
- ▶ Overhead Door Canopy

- ▶ Internal Decorative Linings
- ▶ Door Transportation Storage Rack

- ▶ Single Entrance/Exit Door
- ▶ Glass / ISO Walling Transportation Storage Rack
- ▶ Cover Transportation Storage Rack
- ▶ More accessories are available...

- ▶ ABS Transportation Storage Rack
- ▶ Double Entrance/Exit Door

- ▶ Frame Transportation Storage Rack
- ▶ Bar Tensioned Roof



HEAD OFFICE AND PRODUCTION

Röder HTS Höcker GmbH
Hinter der Schlagmühle 1
Kefenrod, D-63699
Germany

Telephone: +49 (0) 60 49 95 100

Fax: +49 (0) 60 49 95 1020

Email: sales@roderhts.com

Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:

Australia
Austria
Bosnia
Bulgaria

Central America
Croatia
France
Germany

Great Britain
Greece
Romania
India
Ireland
Italy

Middle Asia
Middle East
Netherlands
North America
Poland
Russia

Scandinavia
Singapore
Slovenia
South Africa
South America
Spain
Switzerland



HÖCKER F-SERIES Structures

A-Frame Design

SPECIFICATIONS

F20-300-202

Span width:

20.00m

Eave Height:

3.00m

Ridge height:

6.40m

Peak height:

N/A

Bay distance:

5.00m

Roof pitch:

18°

Number of gable uprights:

3 Gable upright (per end)

Longest component (m):

10.70m

Minimum length:

20.00m

Maximum length:

Unlimited in 5.00 m increments

Snow loading compliance:

N/A

Max allowed wind speed to Norm DIN EN 13782:

102 km/h (0.50kN/m²)

Main profile size:

202/122/4mm(4-channel)

Eave connection type:

Sliding connection

Aluminium type:



European - Hard Pressed Extruded Structural Aluminium

Connecting components:

European - hot dipped, structural grade corrosive resistant galvanised steel

Textile roof and wall covering:

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

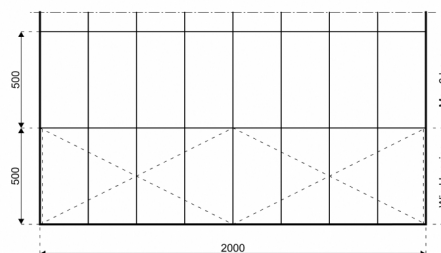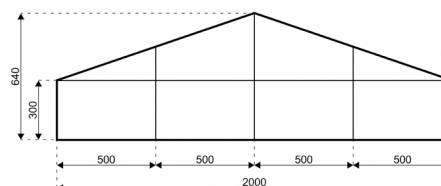

ACCESSORIES AVAILABLE

- ▶ External / Internal Entrance Ramp
- ▶ Overhead Door Canopy

- ▶ Internal Decorative Linings
- ▶ Door Transportation Storage Rack

- ▶ Single Entrance/Exit Door
- ▶ Glass / ISO Walling Transportation Storage Rack

- ▶ ABS Transportation Storage Rack
- ▶ Double Entrance/Exit Door

- ▶ Frame Transportation Storage Rack
- ▶ Bar Tensioned Roof

- ▶ Cover Transportation Storage Rack
- ▶ More accessories are available...



HEAD OFFICE AND PRODUCTION

Röder HTS Höcker GmbH
Hinter der Schlagmühle 1
Kefenrod, D-63699
Germany

Telephone: +49 (0) 60 49 95 100

Fax: +49 (0) 60 49 95 1020

Email: sales@roderhts.com

Web: www.roderhts.com

REPRESENTED WORLDWIDE IN:

Australia
Austria
Bosnia
Bulgaria

Central America
Croatia
France
Germany

Great Britain
Greece
Romania
India
Ireland
Italy

Middle Asia
Middle East
Netherlands
North America
Poland
Russia

Scandinavia
Singapore
Slovenia
South Africa
South America
Spain
Switzerland