

# HOECKER P-SERIES Structures

## A FRAME DESIGN

### Specifications

P0600-240-350

**Span width:**

6.00m

**Eave Height:**

2.40m

**Ridge height:**

3.50m (internal)

**Peak height:**

N/A

**Bay distance:**

3.00m

**Roof pitch:**

20°

**No of gable uprights:**

1

**Longest component (m):**

3.74m

**Minimum length:**

6.00m

**Maximum length:**

Unlimited in 3.00 m increments

**Snow loading compliance:**

N/A

**Max allowed wind speed to DIN:**

80 km/h (0.30kN/m<sup>2</sup>)

**Main profile size:**

89/48/3mm (2-channel) or 110/48/3mm (4-channel)

**Eave connection type:**

Internal Galvanised Steel Insert

**Aluminium type:**



European - Hard Pressed Extruded  
Structural Aluminium

**Connecting components:**

European - hot dipped, structural grade  
corrosive resistant galvanised steel

**Textile roof and wall covering:**

Premium grade, high gloss white, PVC  
coated polyester fabric - UV resistant and  
flame retardant according to: DIN 4102 B1,  
M2; BS 5438/7837; USA NFPA701.

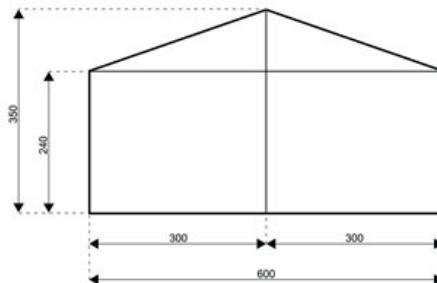

### Accessories Available

- ▶ Georgian or Clear PVC window walls
- ▶ Glass walling systems
- ▶ Integrated cassette ABS / hard walling system.
- ▶ Integrated cassette ISO / hard walling system.
- ▶ Internal flat or pleated linings
- ▶ Multi-sided end bays
- ▶ Overhead door canopies
- ▶ Portal beams instead of cross wires
- ▶ More accessories are available...



**SKIPPY-RENT EVENTS®**  
Evenementen service

[www.skippy-rent.nl](http://www.skippy-rent.nl)